

TECHNICAL DATA SHEET

TIMBER BOG MAT



INTRODUCTION

OVERVIEW

The Conquip Timber Bog Mat is a heavy-duty ground protection solution designed to create stable access across soft, waterlogged, or uneven terrain.

Manufactured from high-strength hardwood timber, it distributes the weight of heavy machinery and vehicles, preventing ground damage and reducing the risk of them becoming stuck.


Available in two sizes, these durable, reusable mats provide temporary roadways, working platforms and site access where ground conditions would otherwise limit operations.

KEY BENEFITS

- Improved ground stability on uneven, soft, or waterlogged terrain.
- Heavy load support, safely distributing vehicle and machinery weight.
- Reduces ground damage and the environmental impact from rutting and soil disturbance.
- Provides safe and reliable site access in challenging ground conditions.
- Suitable for a range of applications, including crane support, utility projects, marine and hydraulic works and temporary access.
- Durable design, ideal for regular reuse and long-lasting performance.
- Easy to install, transport and position on-site.

SPECIFICATION

THE RANGE

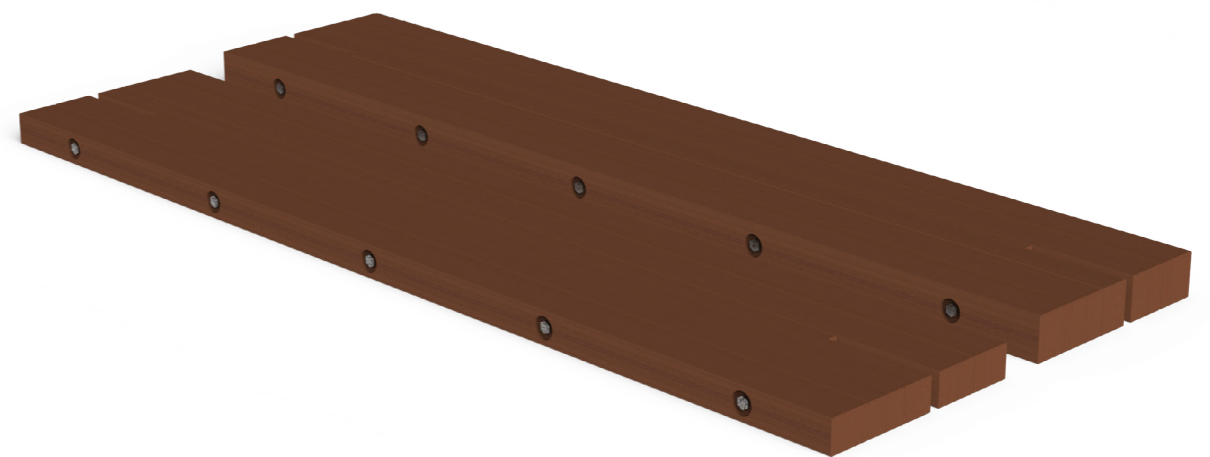

CODE	LENGTH (mm)	WIDTH (mm)	HEIGHT* (mm)	WEIGHT* (kg)	
				DRY	WET
SS615-05000	5000	1000	150	750	900
SS620-05000	5000	1000	200	1000	1200

*Height represents the thickness of the bog mat.

SPECIFICATION

DESCRIPTION

Wood family: Fabaceae-mimosoideae (angiosperm)
 Scientific name(s): *Cylicodiscus gabunensis*

WOOD	
ITEM	DESCRIPTION
Colour	Red brown
Sapwood	Clearly demarcated
Texture	Medium
Grain	Interlocked
Interlocked Grain	Marked


ASSEMBLING

- Nailing/screwing: Good but pre-boring necessary
- Gluing: Correct (for interior only)

FIRE SAFETY

- Conventional French grading:
 Thickness >14mm: M.3 (moderately inflammable), <14mm: M.4 (easily inflammable)
- Euroclasses grading: D s2 d0

SPECIFICATION

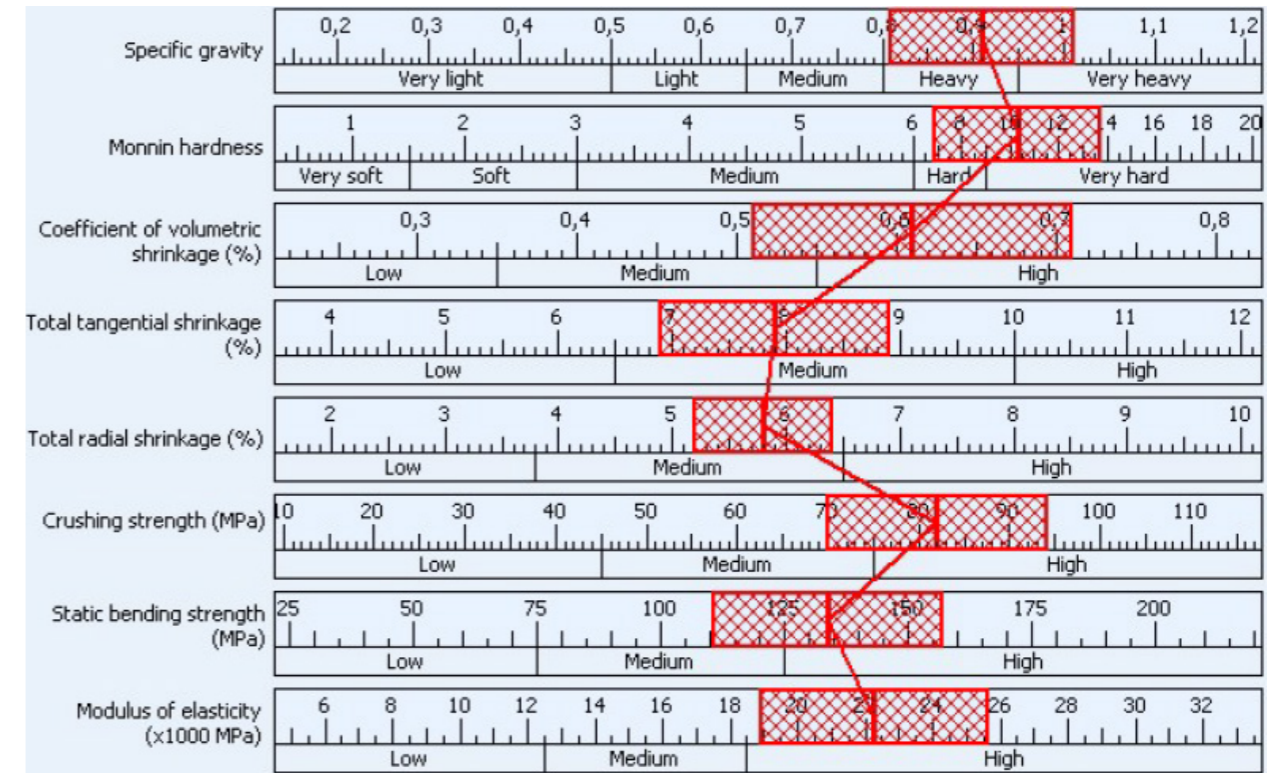

TALKING TO US IS EASY
WE'RE HERE TO HELP

Call us on 0333 300 3470
Email us at sales@cqegroup.com
www.cqegroup.com

