



RC FRAME SOLUTIONS




YOUR #01 PARTNER

We provide innovative solutions for concrete blowout and washout, reducing waste and environmental impact, and increasing safety on site. With 20 years of experience, we offer flexibility in purchase decisions, from hire to sales, and offer end-to-end after-sales support.

**START
EXPLORING**



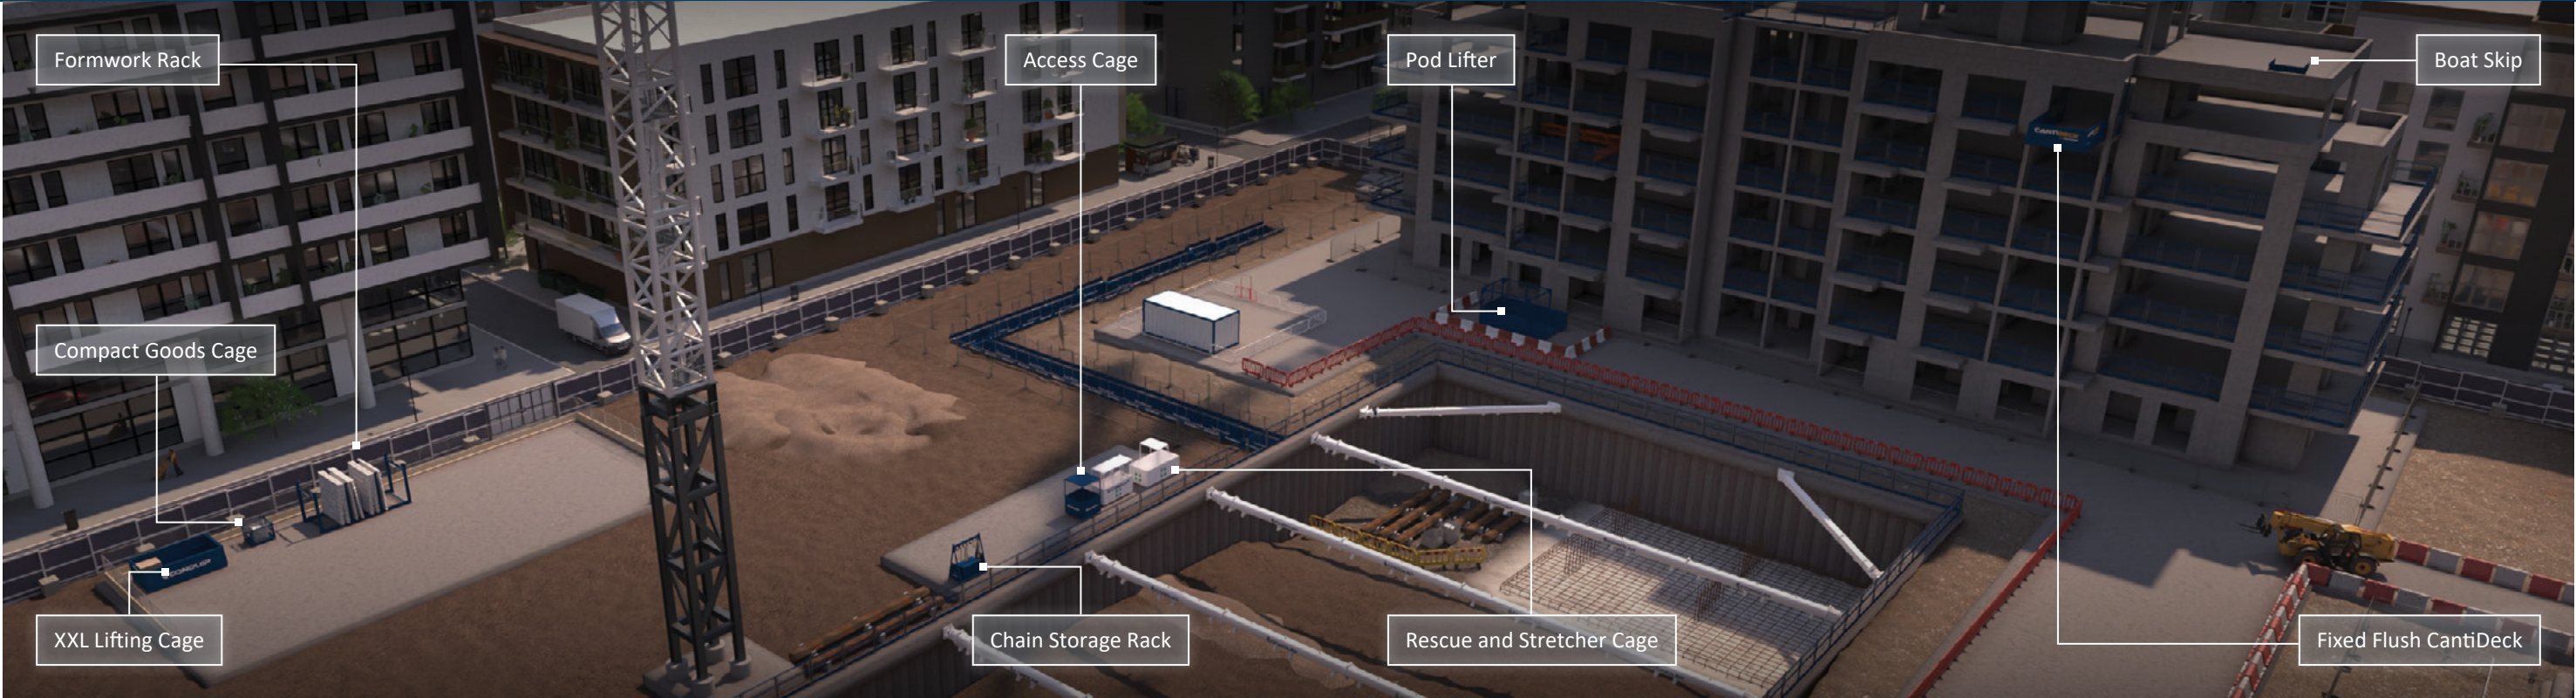

RC FRAME & BUILT ENVIRONMENT

QUALITY EQUIPMENT & SOLUTIONS TO SUPPORT ALL BUILDING TYPES

The construction of reinforced concrete frames, commonly known as RC frames, is a critical aspect of the built environment. These structures form the backbone of many modern buildings, ensuring stability and longevity. We have a deep understanding of the intricacies involved in RC frame construction, offering specialised solutions tailored to the unique demands of this sector.

WHY CHOOSE CONQUIP?


Our products and services are meticulously designed and manufactured to enhance the efficiency of RC frame projects, ensuring timely completion without compromising on quality.

Our commitment to RC frame contractors is evident in our:

- ✓ Product Knowledge
- ✓ Nationwide Reach
- ✓ Hire Service
- ✓ In-House Manufacturing



SCAN HERE

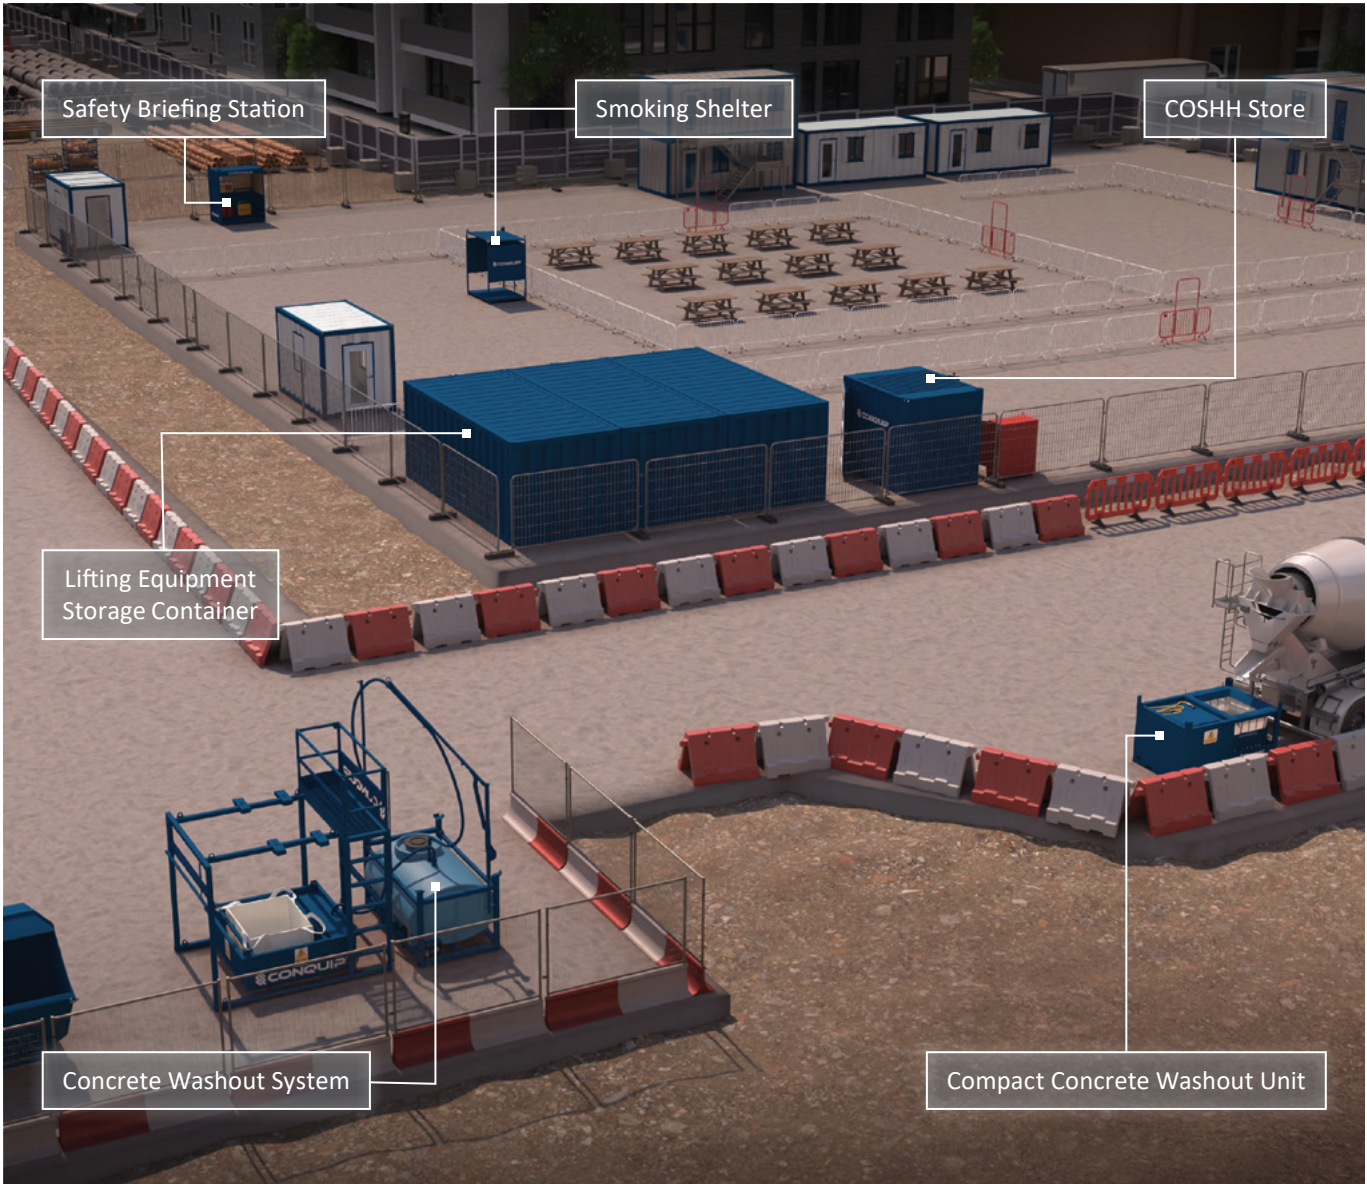



CONCRETE WASHOUT SYSTEM

- A complete solution for concrete washout, capturing and pH neutralising wastewater.
- ✓ Best practice, environmentally friendly methodology for concrete washout, preventing environmental contamination from high-alkaline concrete waste.
 - ✓ Versatile system that can be used for different applications, including washing concrete skips, concrete pumps and concrete trucks.
 - ✓ Filtered wastewater remaining in the water storage tank can be used for further washout or wet-curing process.

CODE	TYPE	LENGTH (mm)	WIDTH (mm)	HEIGHT (mm)	WEIGHT (kg)	WLL* (kg)	CAPACITY (litres)
CS236AE-01800	Filtration Tray	1900	1885	802	376	1000	1800
CS241	Skip Washing Platform	2910	2210	4395	580	-	-
FB306-02000	Water Storage Tank	2593	1599	2900	570	2000	2000

*Working Load Limit

COMPACT CONCRETE WASHOUT UNIT

- A closed-loop system that captures, pH neutralises, and recycles concrete wastewater on construction sites.
- ✓ Used for cleaning concrete truck chutes, smaller tools and equipment.
 - ✓ Compact, space saving system that runs off a 110V, 16Amp power supply.
 - ✓ Unit supplied with reusable filtration bags, pH neutraliser additive and test kits.

CODE	LENGTH (mm)	WIDTH (mm)	HEIGHT (mm)	WEIGHT (kg)	WLL* (kg)	CAPACITY (litres)
CS260AA	2200	1420	1310	675	Self Weight	800

*Working Load Limit



CONCRETE SKIP WITH BALE ARM

Designed for pouring concrete into columns or narrow formwork.

- ✓ Lifting points designed for shackles, reducing wear on bale arm.
- ✓ Designed to be laid horizontally on the ground to assist filling from the concrete truck.
- ✓ Compatible with the blowout attachment and all safety-led attachments.



CODE	LENGTH (mm)	WIDTH (mm)	HEIGHT (mm)	LWB ¹ (mm)	HWB ² (mm)	WEIGHT (kg)	WLL ³ (kg)	CAPACITY (litres)
CS210-00500	1920	1370	1200	2480	1570	340	1500	500
CS210-00750	2080	1520	1340	2670	1740	400	2250	750
CS210-01000	2190	1520	1350	2760	1760	410	3000	1000
CS210-01500	2440	1780	1620	3200	2110	650	4500	1500
CS210-02000	2720	1780	1670	3500	2150	660	6000	2000

¹Length With Bale | ²Height With Bale | ³Working Load Limit

CONCRETE SKIP WITHOUT BALE ARM

A versatile, all-purpose skip for pouring concrete.

- ✓ The safest way to pour concrete columns, walls, narrow formwork and pipe laying.
- ✓ Roll frame for smooth lifting and placement.
- ✓ Concrete blowout attachment available for clearing pump lines after use.
- ✓ Range of safety-led attachments available that remove the need for operatives underneath the skip.

CODE	LENGTH (mm)	WIDTH (mm)	HEIGHT (mm)	WEIGHT (kg)	WLL* (kg)	CAPACITY (litres)
CS210AA-00500	1970	1130	1270	360	1500	500
CS210AA-01000	2350	1385	1465	490	3000	1000
CS210AA-01500	2450	1590	1660	580	4500	1500
CS210AA-02000	2730	1580	1670	670	6000	2000
CS210AA-03000	3500	1980	2130	1000	9000	3000
CS210AA-04000	3830	2150	2350	1480	12000	4000

*Working Load Limit

CONCRETE SKIP ATTACHMENTS

Improving the safety and productivity of concrete pours.

Collaborating with Balfour Beatty, Select Plant Hire and Laing O'Rourke Group, a range of optional extras for the Concrete Skip were developed to combat the dangers involved with the current, traditional methods for concrete pouring.

OUR INNOVATIONS

There are a range of skip set-up options available that can be used individually or in conjunction with each other, accommodating any site-specific application.

Extended Flow Gate Handle


Control the pour from a safer distance, keeping operatives safely away from the suspended load.

Hose Guide & Insert

Precisely position the hose during a pour without putting the site team at risk, enhancing both safety and productivity.

Bauer Connection

Seamlessly switch between different hose lengths with ease, saving time and eliminating manual refitting. Available on 2000-litre skips or larger.

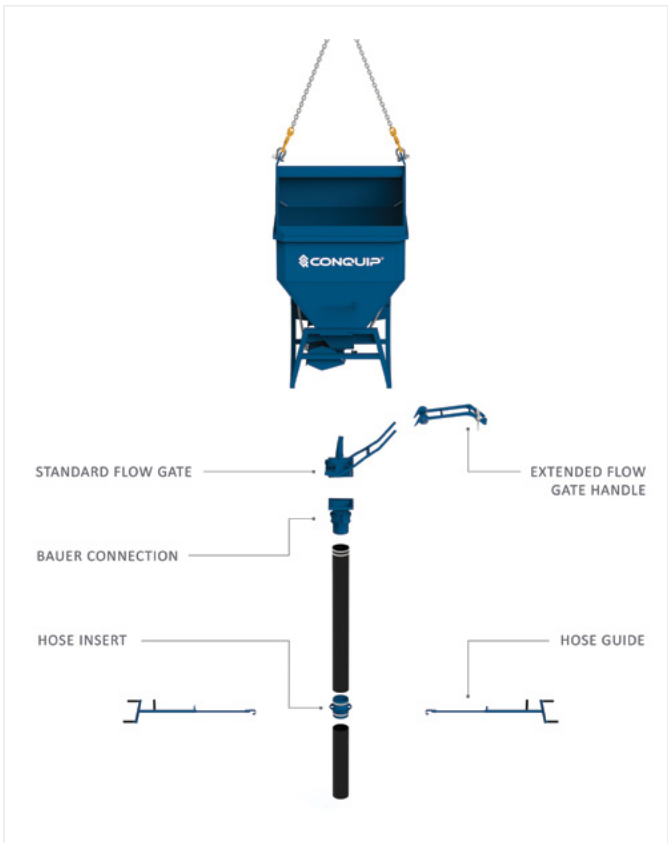



FIXED FLUSH CANTIDECK

A cantilevered loading platform for efficient material handling.

- ✓ Large loading area suitable for wide variety of materials, pallets and awkward loads.
- ✓ Large working load limit capacity.
- ✓ Certified lifting eyes for lifting chain connection.

CODE	OUTBOARD LENGTH (mm)	TOTAL LENGTH (mm)	EXTERNAL WIDTH (mm)	INTERNAL WIDTH (mm)	WEIGHT (kg)	WLL ¹ (kg)
FF20	4000	8000	2000	1550	1850	5000 UDL ²
FF24	4000	8000	2400	1950	2000	5000 UDL ²
FF27	4000	8000	2700	2250	2000	5000 UDL ²
FF35	4000	8000	3500	3050	2600	5000 UDL ²
FF45	4000	8000	4500	4050	2800	5000 UDL ²

¹Working Load Limit | ²Uniformly Distributed Load

SUPER ROLLER CANTIDECK

Rolling loading deck for smooth and efficient loading and unloading.

- ✓ Large loading area suitable for wide variety of materials, pallets and awkward loads.
- ✓ Installing multiple decks in a stacked configuration allows for fast and efficient building load-out.
- ✓ Rolling deck design ensures it can be fully retracted to sit flush with the building's edge when not in use.

CODE	OUTBOARD LENGTH (mm)	INBOARD LENGTH (mm)	TOTAL LENGTH (mm)	EXTERNAL WIDTH (mm)	INTERNAL WIDTH (mm)	WEIGHT (kg)	WLL ¹ (kg)
SR22	3800	5800	9600	2200	1690	2650	5000 UDL ²
SR29	3800	5800	9600	2900	2390	3000	5000 UDL ²
SR35	3800	5800	9600	3500	2990	3400	5000 UDL ²

¹Working Load Limit | ²Uniformly Distributed Load

GOODS CAGE

Safe and convenient method for lifting and transporting bulk bags and other materials without lifting points.

- ✓ Ramp or gate access options.
- ✓ Crane lifting points and fork pockets for easy manoeuvre around site.
- ✓ Mesh sides provide increased visibility for the operator and reduce cage weight, increasing the load capacity.



CODE	TYPE	LENGTH (mm)	WIDTH (mm)	HEIGHT (mm)	WEIGHT (kg)	WLL* (kg)
CA118-01638	Small Gate Access	1280	1280	1280	270	3000
CA124-01658	Small Ramp Access	1360	1300	1300	300	3000
CA118-03277	Large Gate Access	2560	1280	1280	450	3000
CA124AK-03277	Large Ramp Access (Short Side)	2645	1300	1300	460	3000
CA124AL-03277	Large Ramp Access (Long Side)	2560	1300	1300	500	3000

*Working Load Limit

XXL LIFTING CAGE

Large capacity lifting cage for transporting materials or equipment in a single lift.

- ✓ Fewer lifts required to transport materials and equipment, increasing productivity and reducing load-out time. Reduced number of lifts saves on crane time, improving logistics on-site.
- ✓ No site operatives required to sling or 'choke' items as loose items are fully contained within the cage.
- ✓ Multiple cages can be stacked when not in use, saving space on-site or in the yard.
- ✓ Large internal working area suitable for six standard size (1200x1000mm) pallets.



CODE	LENGTH (mm)	WIDTH (mm)	HEIGHT (mm)	WEIGHT (kg)	WLL* (kg)
CA124AL-10824	4140	2335	1310	1110	5000

*Working Load Limit



BOAT SKIP

Heavy-duty, crane-lift skip for general muck and waste removal.

- ✓ No ground operatives needed within the 'danger zone' when the skip is emptied, improving site safety.
- ✓ Reinforced rear back of skip to prevent distortion and catch failure.
- ✓ The 'bush and shackle' lifting point reduces typical wear from regular use, increasing longevity.

CODE	TYPE	LENGTH (mm)	LWB ¹ (mm)	WIDTH (mm)	HEIGHT (mm)	HWB ² (mm)	WEIGHT (kg)	WLL ³ (kg)	CAPACITY (kg)
CA108-00500	Standard	1520	1690	1360	530	1410	130	1000	500
CA108-00750	Standard	1595	1780	1710	560	1450	235	1500	750
CA108-01000	Standard	1955	2135	1555	640	1720	255	2000	1000
CA108-01500	Standard	2187	2390	1885	665	1815	425	3000	1500
CA108-02000	Standard	2355	2555	1835	880	2180	540	4000	2000
CA122-02000	Heavy-Duty	1987	2555	1897	960	1750	626	4000	2000
CA122-03000	Heavy-Duty	2170	2963	2097	1092	2095	795	6000	3000
CA122-04000	Heavy-Duty	2369	3228	2282	1193	2295	1014	8000	4000
CA122-06000	Heavy-Duty	2846	3738	2224	1494	2610	1523	12000	6000

¹Length With Bale Arm | ²Height With Bale Arm | ³Working Load Limit

COMPACT GOODS CAGE

A safe, convenient method of transporting lighter loads to and from high or low locations on-site.

- ✓ Gate and fold-down ramp access allow for quick and easy loading by telehandlers, cranes, pallet carts and sack barrows.
- ✓ Safe and secure lifting method for lighter loads without the risk of materials dropping into the area below.



CODE	TYPE	LENGTH (mm)	WIDTH (mm)	HEIGHT (mm)	INTERNAL LENGTH (mm)	INTERNAL WIDTH (mm)	WEIGHT (kg)	WLL* (kg)
CA118AW-01125	Gate Access	1320	1160	1130	1210	1010	190	1500
CA124AW-01177	Ramp Access	1320	1185	1130	1210	1060	215	1500

*Working Load Limit

CRANE FORKS CAGE

The fail-safe method for moving and lifting blocks and bricks.

- ✓ Best in class, fail-safe method for lifting pallets of blocks and bricks around site.
- ✓ Much quicker than using a net, especially in wet weather or wintry conditions, improving productivity on-site.
- ✓ Compatible with existing Crane Forks, making it a cost-effective solution.
- ✓ Lightweight to ensure the cage, plus a pallet of bricks or block packs, remains within the Working Load Limit of the Crane Forks.
- ✓ Robust latch mechanism prevents door opening after it has been shut.
- ✓ Ramped access allows the cage to be unloaded by a pallet truck on a scaffold loading bay, a CantiDeck, or anywhere with reduced ceiling height.



CODE	EXTERNAL LENGTH (mm)	EXTERNAL WIDTH (mm)	EXTERNAL HEIGHT (mm)	INTERNAL LENGTH (mm)	INTERNAL WIDTH (mm)	INTERNAL HEIGHT (mm)	WEIGHT (kg)	WLL* (kg)
CA147-02000	1540	1390	1290	1200	1300	1200	440	2000

*Working Load Limit



CHAIN STORAGE RACK

An A-frame rack for keeping lifting equipment clean and organised on-site.

- ✓ Keeps chains off the ground, preventing weather deterioration. Supplied with seven overhead hooks as standard and a lockable toolbox.
- ✓ Chains and slings are easy to find and organised, rather than tangled together in stillages, reducing downtime.
- ✓ Can be manufactured according to bespoke requirements, such as mesh sides or bars to hold shackles and hooks.

CODE	TYPE	LENGTH (mm)	WIDTH (mm)	HEIGHT (mm)	WEIGHT (kg)	WLL* (kg)
ST111AS-01000	Chain Storage Rack	2000	1148	2350	340	1400

*Working Load Limit

COMPACT CHAIN STORAGE RACK

A space-saving rack for storing chains and other small lifting equipment.



CODE	TYPE	LENGTH (mm)	WIDTH (mm)	HEIGHT (mm)	WEIGHT (kg)	WLL* (kg)
ST111AT-01000	Single Row Rack	1820	1025	1900	284	600
ST111AU-01000	Double Row Rack	1820	1025	1900	310	1100

*Working Load Limit

CODE	TYPE	LENGTH (mm)	WIDTH (mm)	HEIGHT (mm)	WEIGHT (kg)
ST104-00442	Toolbox*	1210	620	630	80

*Toolbox can be included as an optional extra with both versions

GAS BOTTLE LIFTING CAGE

Secure frame for transporting gas bottles around site.

- ✓ A secure frame for transporting and lifting gas bottles around site, with securing chains for additional safety.
- ✓ A variety of sizes and specifications to suit different quantities and types of gas bottles.
- ✓ Crane lifting points and fork pockets for easy manoeuvrability around site.



CODE	BOTTLE DIAMETER (mm)	LENGTH (mm)	WIDTH (mm)	HEIGHT (mm)	WEIGHT (kg)	WLL* (kg)	CAPACITY (bottles)
CA107-01010	240	515	600	1900	95	120	1
CA107-01100	385	515	600	1900	95	120	1
CA107-04020	240/385	850	1120	2000	130	600	4
CA107-06010	240	850	1120	2000	130	600	6

*Working Load Limit

FORMWORK RACK

A rack designed to store formwork, shuttering panels and other bulky goods.

- ✓ Manufactured using quality steel.
- ✓ Quick delivery.



CODE	TYPE (kN)	LENGTH (mm)	WIDTH (mm)	HEIGHT (mm)	BAY WIDTH (mm)	WEIGHT (kg)
ST127AA-05400	15	5400	2420	2570	1570	1590
ST127AB-05400	8	5400	2420	2570	1570	1000



COSHH STORE

Walk-in storage container designed for secure storage of chemical and other hazardous or flammable substances.

- ✓ Bunded spillage sump protects personnel from spillages and prevents ground contamination.
- ✓ Double doors allow palletised COSHH drums to be placed inside without double handling. Large bund allows for storage of IBCs if required.
- ✓ Best practice option for storage of COSHH materials.

CODE	LENGTH (mm)	WIDTH (mm)	HEIGHT (mm)	WEIGHT (kg)	SHELF WLL* (kg)	BUND WLL* (kg)	CAPACITY (litres)
ST125AF-10000	2438	2200	2260	1350	700	1000	275

*Working Load Limit



CRANELIFT COSHH DRUM STORE

A store for the safe storage of COSHH drums that can be crane lifted when full.

- ✓ Secure storage for hazardous substances, improving site safety.
- ✓ Unit can be lifted when full, improving productivity, with a capacity for up to 4 x 205 litre drums.
- ✓ Bund captures any spillages, preventing environmental contamination.

CODE	LENGTH (mm)	WIDTH (mm)	HEIGHT (mm)	WEIGHT (kg)	WLL* (kg)	CAPACITY (205-litre drums)
ST132-04117	1460	1220	2050	440	1000	4

*Working Load Limit

NEXT-LEVEL SUPPORT

FOR YOU & YOUR PROJECT

- ✓ 20 YEARS' EQUIPMENT SUPPLY EXPERIENCE
- ✓ CONCRETE WASHOUT AND BLOWOUT INNOVATIONS
- ✓ IN-HOUSE MANUFACTURING AND FULL REFURBISHMENT
- ✓ RELIABLE DELIVERIES ON FORS GOLD VEHICLES



GET IN TOUCH

Call us on 0333 300 3470

Email us at sales@cqegroup.com

www.cqegroup.com

