
TECHNICAL DATA SHEET

ROAD FORMS

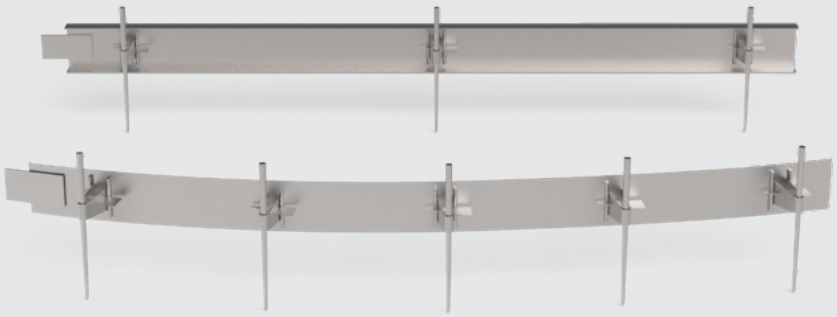

INTRODUCTION

OVERVIEW

Road Forms are robust steel shuttering rails designed for containing and forming materials during the construction of roadways, driveways, ground slabs and other concrete surfaces.

They provide edge restraint and a guide for concrete placement, helping contractors achieve clean and accurate finished levels. Their durability makes them suitable for demanding construction environments and regular, repeated use on-site.

Ideal for use across civil engineering, groundworks, housebuilding and concrete construction projects, Road Forms offer a more efficient alternative to temporary timber shuttering.

KEY BENEFITS

- Durable steel construction.
- Available in rigid or flexible variations to suit straight and curved edges.
- Provides secure containment during concrete placement.
- Helps achieve straight, clean and consistent slab edges.
- Suitable for roadways, drives, ground slabs and similar applications.
- Designed for repeated use across multiple projects
- Quick and practical to install and relocate.

SPECIFICATION

THE RANGE



CODE	TYPE	WEIGHT* (kg)
SS603AB-00100	Rigid	21
SS603AB-00150	Rigid	24
SS603AB-00200	Rigid	30
SS603AB-00250	Rigid	35
SS603AB-00300	Rigid	45
SS603AC-00100	Flexible	19
SS603AC-00150	Flexible	23
SS603AC-00200	Flexible	28

*Weights are approximate and can vary across batches.

SPECIFICATION

RIGID ROAD FORMS

ITEM	PRODUCT CODE
Road Form Rigid 100	SS603AB-00100
Road Form Rigid 150	SS603AB-00150
Road Form Rigid 200	SS603AB-00200
Road Form Rigid 250	SS603AB-00250
Road Form Rigid 300	SS603AB-00300



LENGTH (mm)	HEIGHT (mm)
3000	100
	150
	200
	250
	300

SPECIFICATION

FLEXIBLE ROAD FORMS

ITEM	PRODUCT CODE
Road Form Flexible 100	SS603AC-00100
Road Form Flexible 150	SS603AC-00150
Road Form Flexible 200	SS603AC-00200



LENGTH (mm)	HEIGHT (mm)
3000	100
	150
	200

SPECIFICATION

PINS



CODE	ITEM	LENGTH (mm)
SS603AA	Road Form Pin 450	450
SS603AB	Road Form Pin 600	600
SS603AC	Road Form Pin 900	900

NOTE: Conquip can supply a pin extractor with your order. Contact us to discuss your requirements.

COMPATIBILITY

RIGID ROAD FORM



FLEXIBLE ROAD FORM



ROAD FORM TYPE	ROAD FORM HEIGHT (mm)	PIN LENGTH (mm)	PIN QUANTITY (per form)
Rigid	100	450	3
Rigid	150	600	3
Rigid	200	600	3
Rigid	250	900	3
Rigid	300	900	3
Flexible	100	450	5
Flexible	150	600	5
Flexible	200	600	5

TALKING TO US IS EASY

WE'RE HERE TO HELP

Call us on 0333 300 3470
Email us at sales@cqegroup.com
www.cqegroup.com

Copyright © 2026 Conquip Engineering Group. All Rights Reserved.
Road Forms - Issue 01